

ST 300D

Sensor tester

ENG



Supplied material

- Sensor's tester
- User's manual
- Power adapter
- USB cable



user's manual

Please read the manual carefully before using this product. This product should be applied by someone with a certain level of electrical knowledge. Please read and make sure that you understand how to operate the product before using it. Please keep this manual readily accessible for future references when needed.

warning

Please comply with the warnings indicated before:

- Please do not exceed maximum rated voltage during usage in order to prevent tester malfunction or fire.
- Please do not apply AC power supply to avoid breakage.
- Please do not subject the product to high temperature to avoid scalding.
- The product contains a non removable Li-ion battery. For the delivery of the product, follow National and IATA regulations.

precautions

Comply with the warnings indicated below for they are important:

- Please do not use it in flammable or explosive environments.
- Please do not use it in environments with water, oil, chemicals or steams.
- Please do not disassemble, repair or alter this product.
- Please do not exceed the rated voltage and current.
- Please do not exceed the rated environment.
- Please observe electrical polarity when making connections.
- Please connect load correctly.
- Please avoid short-circuiting the load.
- Please do not operate it „if the housing is broken.
- When disposing of the tester, please treat it as an industrial waste.

warranty

Our products have been tested prior to shipping, however if malfunction occurs, please contact our offices near you and present the failure in details so that we can provide the best solution to you.

Warranty Period

The warranty period is 1 year starting from the shipment date .

Scope of warranty

⁽¹⁾ If malfunction is caused by our company within the warranty period, free service of repairing shall be offered. The cases listed below do not fall into the scope of warranty.

- Fail to comply with operating instruction. User's manual or breach of contracts with our company.
- Any malfunction that is caused by buyer's own device or software, instead of our product's defect
- Malfunction that is caused by modification or repairmen outside our company.
- Malfunction that could be avoided by a correct repair or replacing of wearing parts by following

operating instruction or User's manual.

- Malfunction that is caused by unpredictable factors (such as change of science and technology) after the product is delivered from our company.
- Malfunction that is caused by natural disasters such as fire, earthquake and flood; or abnormal shaft voltage.

⁽²⁾ Any indirect consequences such as devices damage, loss of opportunities, lost profits, or other damage beyond the scope of warranty (Which is only limited to regulation)⁽¹⁾

specifications

serial number	items	specifications	remarks
1	Test Type	NPN or PNP	Auto-Detect
2	Output Voltage	4.8 V ~ 5.2 V	5 V output
		23.0 V ~ 24.5 V	24 V output
3	Output Current	≤ 0.2 A	5 V output
		≤ 0.15 A	24 V output
4	Battery Capacity	2,500 mAh	Li-ion
5	Theoretical Working Hour	10 h	24 V, 15 mA
6	Charging Time	4.5 h	-
7	Output Voltage for charging External Device	4.8 V ~ 5.2 V	Power Bank
8	Working Temperature	-10 °C ~ 45 °C	-
9	Weight	145 g	-
10	Size	125.5 x 62 x 22.5	-
11	Other Functions	Silence mode, Sleep mode, Output short-circuit protection	

operating instructions

Charging

When BAT light turns into red, It Indicates that test box needs to be charged. During charging, it remains in red until the sensor tester is fully charged and then it becomes green.

Sleep Mode

When the sensor tester is on standby for more than 2 minutes it will automatically enter into sleep mode to lower power consumption. Meanwhile the BAT light will flicker 2 second intervals to remind user to switch the power off. When pressing the pulse button again, the sensor tester will be re-activated.

Silence Mode

Press and hold Pulse Button for 5 seconds, the NPN light and PNP light will flicker twice at the same time then the test box will enter into silence mode. When there is an output from the sensor the corresponding NPN light or PNP light on the sensor tester will switch on without the beeping sound.

Power bank

Sensor tester can serve as a power bank. Connect the USB charging cable between the OUT port and the device that needs charging. The sensor tester will begin to charge the device when the power button is switched on.


Note

- Please make sure the power is off before connecting the cable.
- Please make sure the voltage fluctuations are within maximum rated range.
- When the power is on, please do not apply the device in the first 0.5 s.
- Please do not subject the device to dust, dirt or vapor.
- Please do not subject the device to water, oil or organic solvent such as diluents.

operating instruction

Connecting the product cables to the tester accordingly a) Three Wired

• Three wires




① circuit

Power On: Select 5V or 24V according to product's requirements

Test: Switch the power button, the sensor tester will scan the sensor. If there is an output from the sensor, the corresponding NPN light or PNP light will be on along with a beeping sound


Pulse: User can press Pulse button to supply power to the sensor. When pressing Pulse Button, the light indicator will be on. Supplying output voltage to the red wire terminal. The output voltage is determined by the power switch

• Two wires

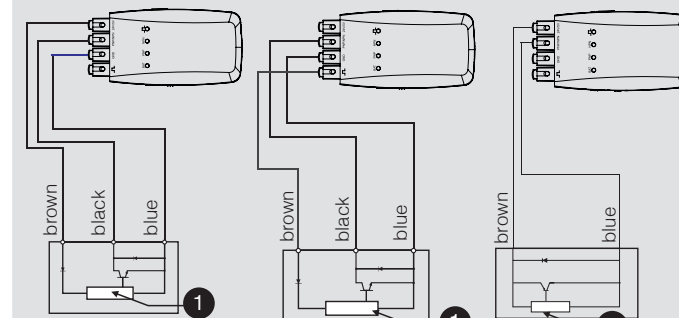

① circuit

outline dimensional drawing (mm)

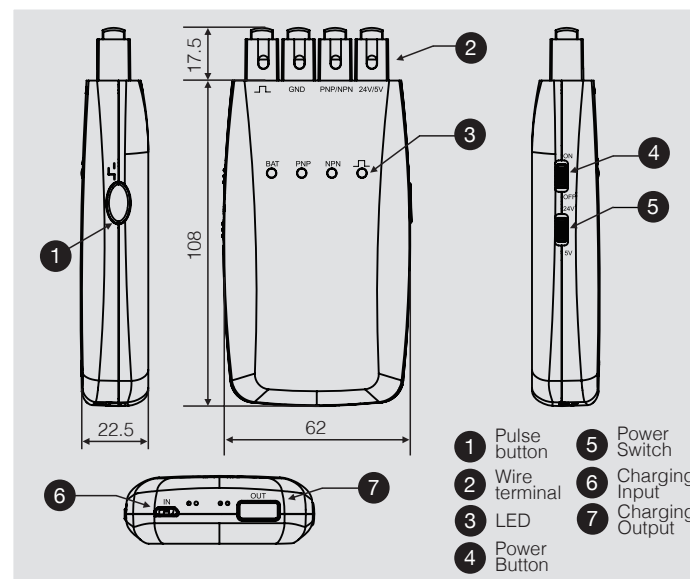

- ① Pulse button
- ② Wire terminal
- ③ LED
- ④ Power Button
- ⑤ Power Switch
- ⑥ Charging Input
- ⑦ Charging Output



Micro Detectors

Italian Sensors Technology

M.D. Micro Detectors S.p.A.

Strada S. Caterina 235 - 41122 Modena - Italy

tel. + 39 059 420411

fax + 39 059 253973

info@microdetectors.com

www.microdetectors.com