

PROXY TESTER





DESCRIPTION

Proxy Tester is a portable instrument created to satisfy the needs of both installers as well as retailers. It makes it possible to control correct functioning of any D.C. sensor (2-3-4 wires and Namur) or magnetic sensor even when lacking expensive sophisticated instrumentation (stable power generators, oscilloscopes etc.). This enables a quick check of sensor's efficiency without having to be a specialised technician. Consequently this reduces maintenance and repair time in an industrial automation plant where malfunction of sensor is often difficult to identify.

Proxy Tester is powered by a battery and has a battery level indicator.

TECHNICAL CHARACTERISTICS	
Power supply	2 alkaline 9V batteries (6LR61)
Working temperature	0 - 50 °C
Battery level indicator	Available
Led	<ul style="list-style-type: none"> Red NPN sensors Green PNP or two wire sensors
Housing	Plastic
Function	D.C. sensors or magnetic sensors

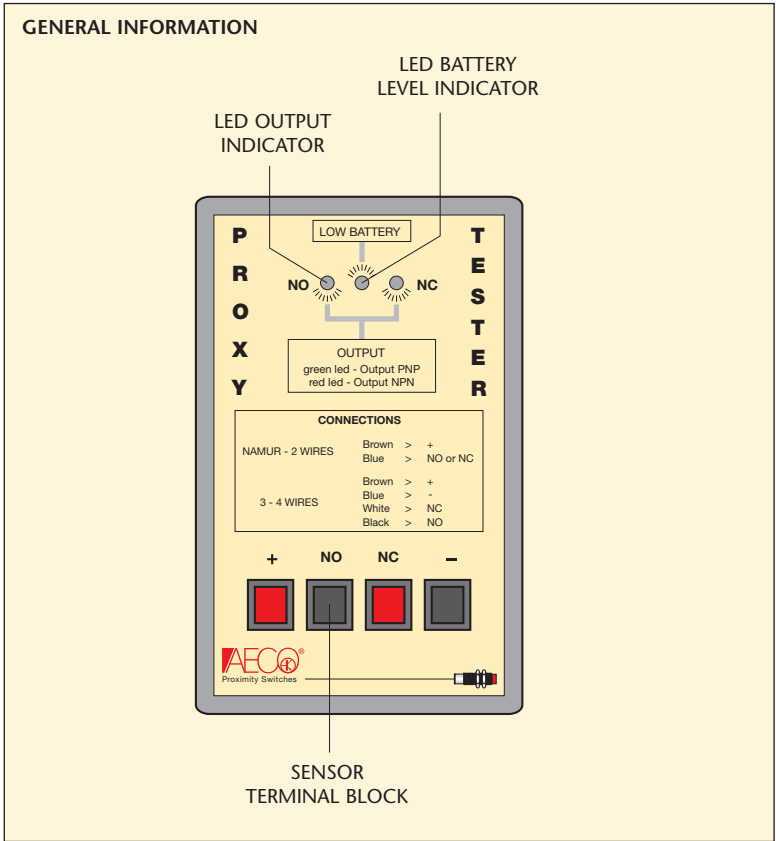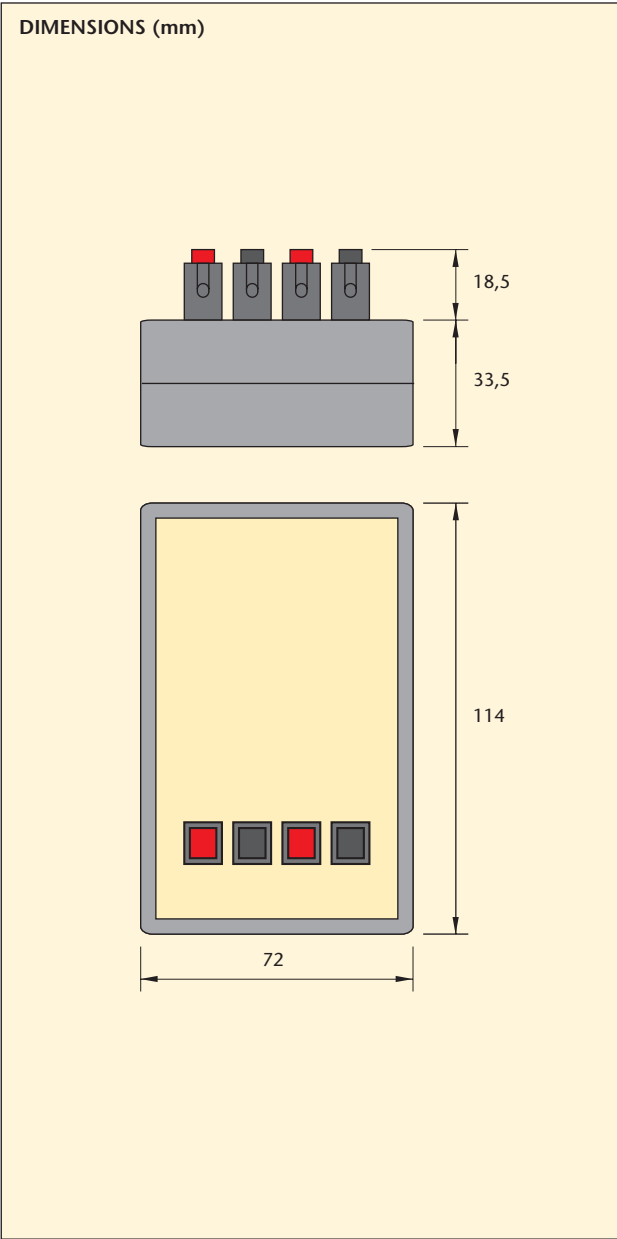

To replace batteries, unscrew the 4 rear screws on Proxy Tester and gently lift off upper half of housing. Detach old batteries and replace with new ones of the same type. Replace and close housing, screw down 4 rear screws of tester.