


RS232 / (RS485)  
female connector  
Pin # 1: Rx 1  
2: Tx 1  
3: GND  
4: no  
5: TxD 2  
6: RxD 2  
7: GND


Current output  
Pin # 1: IOut 1+  
2: IOut 1-  
3: IOut 2+  
4: IOut 2-

Optional  
(Start/Stop, High)  
Pin # 1: +15V  
2: GND  
3: 0-20mA input  
4: Start/ Stop

Calibration switch  
Pin # 1: Switch  
2: GND  
3: LED

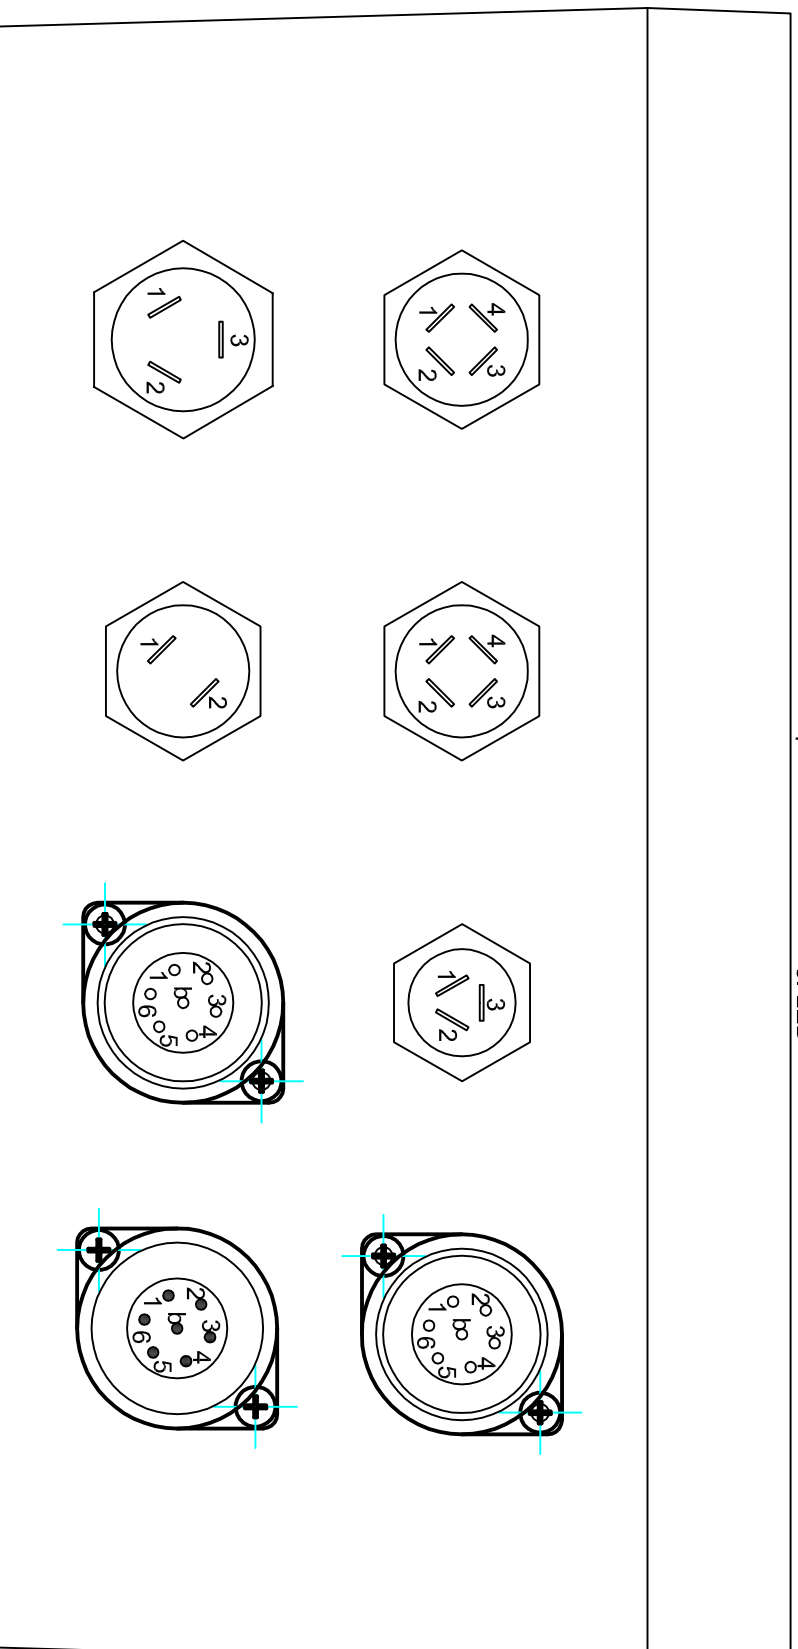


Main power  
Pin # 1: PE  
2: L1  
3: N



Product selector  
female connector  
Pin # 1: D1  
2: D2  
3: D3  
4: GND  
5: no  
6: no  
7: no

Detector  
male connector

Datum	Name	
27.02.2018	Harrer	

HK8- 8 Products