



## HM500 series

Robust, state-of-the-art touch panels

## Global Network

# Panasonic

## HUMAN MACHINE INTERFACES

HM500 SERIES

North America | Europe | Asia Pacific | China | Japan

### Panasonic Electric Works

Please contact our Global Sales Companies in:

Europe		
▶ <b>Headquarters</b>	<b>Panasonic Electric Works Europe AG</b>	Rudolf-Diesel-Ring 2, 83607 Holzkirchen, Tel. +49 (0) 8024 648-0, Fax +49 (0) 8024 648-111, <a href="http://www.panasonic-electric-works.com">www.panasonic-electric-works.com</a>
▶ <b>Austria</b>	<b>Panasonic Electric Works Austria GmbH</b>	Josef Madersperger Str. 2, 2362 Biedermansdorf, Tel. +43 (0) 2236-26846, Fax +43 (0) 2236-46133 <a href="http://www.panasonic-electric-works.at">www.panasonic-electric-works.at</a>
	<b>Panasonic Industrial Devices Materials Europe GmbH</b>	Ennsshafenstraße 30, 4470 Enns, Tel. +43 (0) 7223 883, Fax +43 (0) 7223 88333, <a href="http://www.panasonic-electronic-materials.com">www.panasonic-electronic-materials.com</a>
▶ <b>Benelux</b>	<b>Panasonic Electric Works Sales Western Europe B.V.</b>	De Rijn 4, (Postbus 211), 5684 PJ Best, (5680 AE Best), Netherlands, Tel. +31 (0) 499 372727, Fax +31 (0) 499 372185, <a href="http://www.panasonic-electric-works.nl">www.panasonic-electric-works.nl</a>
▶ <b>Czech Republic</b>	<b>Panasonic Electric Works Europe AG</b>	Administrative centre PLATINIUM, Veverí 3163/111, 616 00 Brno, Tel. +420 541 217 001, Fax +420 541 217 101, <a href="http://www.panasonic-electric-works.cz">www.panasonic-electric-works.cz</a>
▶ <b>France</b>	<b>Panasonic Electric Works Sales Western Europe B.V.</b>	Succursale française, 10, rue des petits nuisseaux, 91370 Verrières Le Buisson, Tel. +33 (0) 1 6013 5757, Fax +33 (0) 1 6013 5758, <a href="http://www.panasonic-electric-works.fr">www.panasonic-electric-works.fr</a>
▶ <b>Germany</b>	<b>Panasonic Electric Works Europe AG</b>	Rudolf-Diesel-Ring 2, 83607 Holzkirchen, Tel. +49 (0) 8024 648-0, Fax +49 (0) 8024 648-111, <a href="http://www.panasonic-electric-works.de">www.panasonic-electric-works.de</a>
▶ <b>Hungary</b>	<b>Panasonic Electric Works Europe AG</b>	Magyarországi Közvetlen Kereskedelmi Képviselet, 1117 Budapest, Neumann János u. 1., Tel. +36 1 999 89 26 <a href="http://www.panasonic-electric-works.hu">www.panasonic-electric-works.hu</a>
▶ <b>Ireland</b>	<b>Panasonic Electric Works UK Ltd.</b>	Irish Branch Office, Dublin, Tel. +353 (0) 14600969, Fax +353 (0) 14601131, <a href="http://www.panasonic-electric-works.co.uk">www.panasonic-electric-works.co.uk</a>
▶ <b>Italy</b>	<b>Panasonic Electric Works Italia srl</b>	Via del Commercio 3-5 (Z.I. Ferlina), 37012 Bussolengo (VR), Tel. +39 0456752711, Fax +39 0456700444, <a href="http://www.panasonic-electric-works.it">www.panasonic-electric-works.it</a>
▶ <b>Nordic Countries</b>	<b>Panasonic Electric Works Europe AG</b>	Filial Nordic, Knarramåsgatan 15, 164 40 Kista, Sweden, Tel. +46 859476680, Fax +46 859476690, <a href="http://www.panasonic-electric-works.se">www.panasonic-electric-works.se</a>
	<b>Panasonic Eco Solutions Nordic AB</b>	Jungmansgatan 12, 21119 Malmö, Tel. +46 40 697 7000, Fax +46 40 697 7099, <a href="http://www.panasonic-fire-security.com">www.panasonic-fire-security.com</a>
▶ <b>Poland</b>	<b>Panasonic Electric Works Polska sp. z o.o.</b>	ul. Wotoska 9A, 02-583 Warszawa, Tel. +48 22 338-11-33, Fax +48 22 338-12-00, <a href="http://www.panasonic-electric-works.pl">www.panasonic-electric-works.pl</a>
▶ <b>Spain</b>	<b>Panasonic Electric Works España S.A.</b>	Barajas Park, San Severo 20, 28042 Madrid, Tel. +34 913293875, Fax +34 913292976, <a href="http://www.panasonic-electric-works.es">www.panasonic-electric-works.es</a>
▶ <b>Switzerland</b>	<b>Panasonic Electric Works Schweiz AG</b>	Grundstrasse 8, 6343 Rotkreuz, Tel. +41 (0) 41 7997050, Fax +41 (0) 41 7997055, <a href="http://www.panasonic-electric-works.ch">www.panasonic-electric-works.ch</a>
▶ <b>United Kingdom</b>	<b>Panasonic Electric Works UK Ltd.</b>	Sunrise Parkway, Linford Wood, Milton Keynes, MK14 6 LF, Tel. +44 (0) 1908 231555, Fax +44 (0) 1908 231599, <a href="http://www.panasonic-electric-works.co.uk">www.panasonic-electric-works.co.uk</a>
North & South America		
▶ <b>USA</b>	<b>Panasonic Industrial Devices Sales Company of America</b>	629 Central Avenue, New Providence, N.J. 07974, Tel. 1-908-464-3550, Fax 1-908-464-8513, <a href="http://www.pewa.panasonic.com">www.pewa.panasonic.com</a>
Asia Pacific/China/Japan		
▶ <b>China</b>	<b>Panasonic Electric Works Sales (China) Co. Ltd.</b>	Level 2, Tower W3, The Towers Oriental Plaza, No. 2, East Chang An Ave., Dong Cheng District, Beijing 100738, Tel. +86-10-5925-5988, Fax +86-10-5925-5973
▶ <b>Hong Kong</b>	<b>Panasonic Industrial Devices Automation Controls Sales (Hong Kong) Co., Ltd.</b>	RM1205-9, 12/F, Tower 2, The Gateway, 25 Canton Road, Tsimshatsui, Kowloon, Hong Kong, Tel. +852-2956-3118, Fax +852-2956-0398
▶ <b>Japan</b>	<b>Panasonic Corporation</b>	1048 Kadoma, Kadoma-shi, Osaka 571-8686, Japan, Tel. +81-6-6908-1050, Fax +81-6-6908-5781, <a href="http://www.panasonic.net">www.panasonic.net</a>
▶ <b>Singapore</b>	<b>Panasonic Industrial Devices Automation Controls Sales Asia Pacific</b>	300 Beach Road, #16-01 The Concourse, Singapore 199555, Tel. +65-6390-3811, Fax +65-6390-3810



# Panasonic®

Copyright © 2014 • Printed in Germany  
4239 euen 12/14

## HM500 series: Robust & state-of-the-art

### Key features

The HM500 series combines state-of-the-art features and a top performance HMI in an outstanding design. The ideal choice for satisfying a wide range of applications.


- Available sizes: 4.3", 7", 10.4", 13.3"
- IP66 front panel
- Innovative, full-metal design
- Bright, 64K color LED technology display
- 600MHz & 1GHz ARM cortex A8 processor
- Microsoft Windows CE 6.0 operating system
- Ethernet, USB and integrated configurable serial ports
- SD card slot
- Gateway function, remote application control and online customer support
- Horizontal or vertical installation
- Low power consumption; with cooling system
- CE/UL certification
- Tropicalized electronics



## HMWin: Programming environment

### Key features

- Simple, intuitive interface
- Project tree resource navigation
- Data displayed in numeric format, bargraph, analog indicators and images
- Multilanguage support with import and export function for texts
- Data acquisition and display in line or bar graphs
- Alarm management and event history
- User group and password management
- Audit Trail recipe management
- Remote monitoring and control with Client-Server architecture based on Web technology (compatible with smart-phones and tablets)
- Powerful JavaScript engine
- Large ready-to-use macro library
- Reports printable on USB printer and as PDF file on each memory
- Advanced HMI objects: scheduler and event planning, rotating menus, RSS Feeds, IP camera input
- On-line and off-line simulation

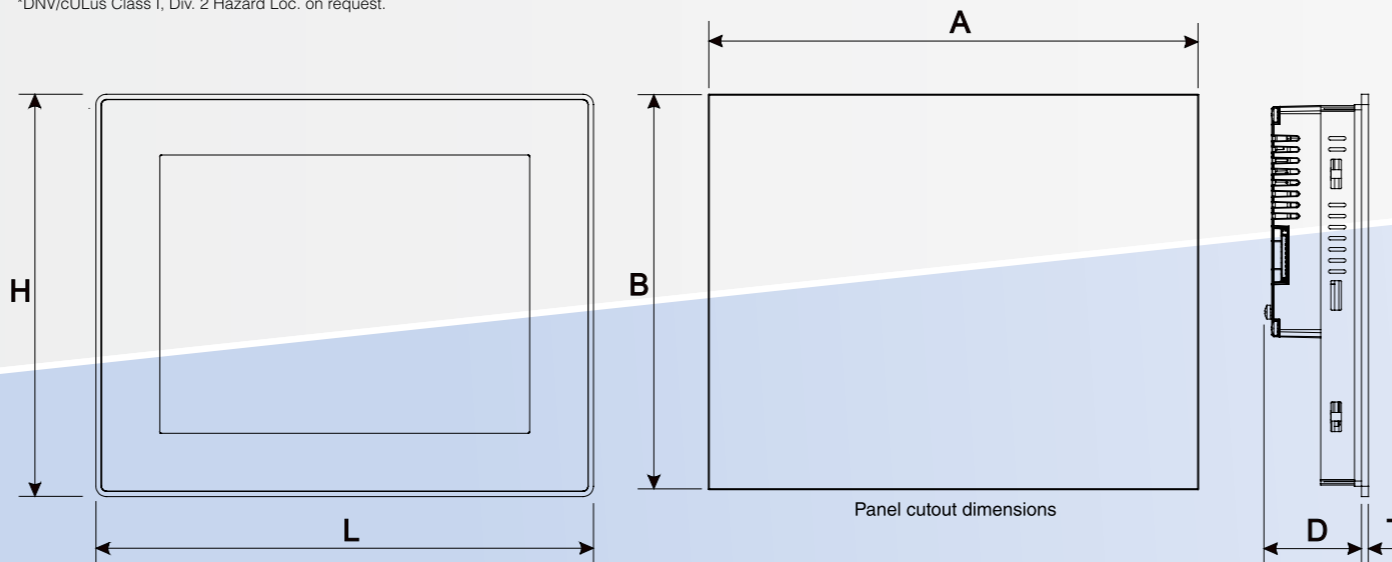

\*DNW/cULus Class 1, Div. 2 Hazard Loc. on request.

	HM504	HM507	HM510	HM513
Display size	4.3" TFT 16:9	7" TFT 16:9	10.4" TFT	13.3" TFT 16:9
Resolution	480 x 272, WQVGA	800 x 480, WVGA	800 x 600, SVGA	1280 x 800, WXGA
Backlight	LED	LED	LED	LED
Brightness	150 cd/m <sup>2</sup> typ.	300 cd/m <sup>2</sup> typ.	300 cd/m <sup>2</sup> typ.	300 cd/m <sup>2</sup> typ.
Dimming	Yes	Yes	Yes	Yes
Colors	64K	64K	64K	64K
Touchscreen	Analog resistive	Analog resistive	Analog resistive	Analog resistive
Portrait mode	Yes	Yes	Yes	Yes
User memory	128MB flash	128MB flash	256MB flash	256MB flash
Serial port (Universal)	RS232, RS485, RS422, software configurable	RS232, RS485, RS422, software configurable	RS232, RS485, RS422, software configurable	RS232, RS485, RS422, software configurable
Ethernet port	2 10/100Mbit with integrated switch	2 10/100Mbit with integrated switch	2 10/100Mbit with integrated switch	2 10/100Mbit with integrated switch
USB port	1 Host interface version 2.0	2 Host interfaces (1 version 2.0, 1 version 2.0 and 1.1)	2 Host interfaces (1 version 2.0, 1 version 2.0 and 1.1)	2 Host interfaces (1 version 2.0, 1 version 2.0 and 1.1)
Vector graphics	Yes, supports SVG	Yes, supports SVG	Yes, supports SVG	Yes, supports SVG
Dynamic objects	Yes	Yes	Yes	Yes
TrueType font	Yes	Yes	Yes	Yes
Alarms	Yes	Yes	Yes	Yes
Alarm history	Yes	Yes	Yes	Yes
Recipes	Yes	Yes	Yes	Yes
Password	Yes	Yes	Yes	Yes
Trends	Yes	Yes	Yes	Yes
Multilanguage management	Yes	Yes	Yes	Yes
Real Time Clock	Yes, with battery	Yes, with battery	Yes, with battery	Yes, with battery
Battery	Rechargeable battery	Rechargeable battery	Rechargeable battery	Rechargeable battery
Expansion slots	1 optional plugin	2 optional plugins	2 optional plugins	2 optional plugins
Memory card	SD card slot	SD card slot	SD card slot	SD card slot
Voltage	24V DC (10 - 32V DC)	24V DC (10 - 32V DC)	24V DC (10 - 32V DC)	24V DC (10 - 32V DC)
Max. current consumption (typ.)	0.4A at 24V DC (max.)	0.7A at 24V DC (max.)	1A at 24V DC (max.)	1.2A at 24V DC (max.)
Operating temperature	0 to 50°C	0 to 50°C	0 to 50°C	0 to 50°C
Storage temperature	-20 to +70°C	-20 to +70°C	-20 to +70°C	-20 to +70°C
Humidity	5 to 85%, RH non-condensing	5 to 85%, RH non-condensing	5 to 85%, RH non-condensing	5 to 85%, RH non-condensing
Weight	Approx. 1.0kg	Approx. 1.0kg	Approx. 2.1kg	Approx. 2.8kg
Front panel (L x H)	147 x 107mm	187 x 147mm	287 x 232mm	336 x 267mm
Panel cutout (A x B)	136 x 96mm	176 x 136mm	276 x 221mm	326 x 256mm
Depth (D + T)	56 + 4mm	47 + 4mm	56 + 4mm	56 + 4mm
Degree of protection (front)	IP66	IP66	IP66	IP66
Degree of protection (back)	IP20	IP20	IP20	IP20
Certification	CE, UL*	CE, UL*	CE, UL*	CE, UL*



## Quality vector graphics

- Supports SVG vector graphics
- Dynamic object properties with tags
- Object properties accessible via Javascript
- Dynamic interaction between properties of different objects
- Animation
- TrueType font
- Large set of symbols and objects



## Communication and Gateway

- Integrated web server, FTP server
- Integrated web browser
- Supports VNC technology for remote desktop
- E-mail alerts
- Gateway function between different protocols

